

# A1

## Automatic Dispenser



- ➡ Smaller Investment
- ➡ Purge-free

#### SANTINT • CHINA

Add: Feilong Road, Xingyang,  
Zhengzhou, China  
Email: [info@santint.com](mailto:info@santint.com)

#### SANTINT • HOLLAND

Add: Lageweg 35 - J, 2222 AG  
Katwijk The Netherlands  
Email: [sales@santint-europe.com](mailto:sales@santint-europe.com)

#### SANTINT • POLAND

Add: 19 Postępu Street  
(warehouse no. 5) 02-676  
Warsaw, Poland  
Email: [albert@santintpoland.com](mailto:albert@santintpoland.com)

#### SANTINT • U.S.A

Add: 2000 Bloomingdale Road,  
Suite 205, Glendale Heights,  
IL 60139, U.S.A  
Email: [info@santintusa.com](mailto:info@santintusa.com)

#### SANTINT • BRAZIL

Add: Av. Rosa Kasinski,  
1109, G29 Capuava, Mauá,  
SP - Brasil CEP 09380-128  
Email: [marcos@santint.com](mailto:marcos@santint.com)

#### SANTINT • INDIA

Add: H.No.692, Gala No.04, Print  
World Industrial Complex,  
Bhatale, Vehele Village, Opposite  
Balaji Compound, Bhiwandi,  
Maharashtra - 421302  
Email: [nick@santint.com](mailto:nick@santint.com)

# A1 FEATURES >>>

Applicable to tinting shops and supermarkets mainly engaged in 5L paints.




Bluetooth/Wireless Module(Optional)

**SANTINT**  
WHERE INNOVATION MEETS PRECISION


**1 Variable Structure**  
Simple Refitting Design  
Cost-effective  
20GP contains 49 units  
40GP contains 103 units



**2 Box/Table Tinting**  
PC cost saving;  
pre-installed software,  
shorter installation time




**3 Effective Space Saving Footprint only 0.54m<sup>2</sup>**



**4 Excellent Reproducibility of Accuracy**



**5 100% Recirculation**  
Zero nozzle dryness/blockage;  
purge-free;  
maintenance-free;  
colorant saving;  
stable accuracy.

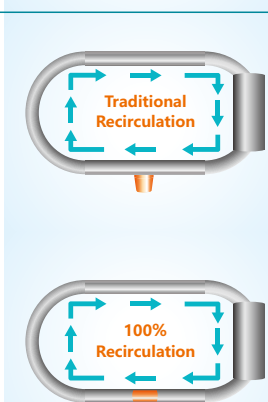

|                                                               |                                            |                            |
|---------------------------------------------------------------|--------------------------------------------|----------------------------|
| <p>Piston Pump<br/>Sequential Dispensing</p>                  | <p>■ Flow Rate 600ml/min</p>               |                            |
|                                                               | <p>■ Efficiency 200ml/min</p>              |                            |
| <p>■ Minimum Shot 1/384Y(0.077ml)</p>                         | <p>■ Pump Capacity A1: 60ml A1-HB:50ml</p> |                            |
| <p>1/2000Y (0.015ml) Optional</p>                             | <p>■ Stirring Speed 20rpm</p>              |                            |
| <p>■ Canister Volume 12x1.35L+4x2.3L 16x1.35L(Optional)</p>   |                                            |                            |
| <p>■ Tinters Up to 16</p>                                     |                                            |                            |
| <p>■ Can Size (DxH) 320mm x 420mm(MAX) 80mm x 100mm (MIN)</p> |                                            |                            |
| <p>■ Machine Size (W x D x H) 670x800x1215mm</p>              |                                            |                            |
| <p>■ Package Size (W x D x H) 760x970x760mm</p>               |                                            |                            |
| <p>■ Net Weight 105kg</p>                                     | <p>■ Power</p>                             | <p>≤ 100W</p>              |
| <p>■ Gross Weight 130kg</p>                                   | <p>■ Power Supply</p>                      | <p>220V/110V 50Hz/60Hz</p> |

# A1

## Technical Parameters

