

Cantilever Palletizer

➔ Flexible and efficient, fast delivery

➔ Stable and reliable, less labor required



SANTINT • CHINA

Add: Sangong & Xingyun Road,
Xingyang City, Zhengzhou City,
Henan Province, 450121 China
Email: info@santint.com

SANTINT • HOLLAND

Add: Gieterij 28, 2211 XK
Noordwijkerhout, The Netherlands
Email: sales@santint-europe.com

SANTINT • POLAND

Add: 43 Szyszkowa Street,
02-285 Warsaw, Poland
Email: albert@santintpoland.com

SANTINT • U.S.A

Add: 2000 Bloomingdale Road,
Suite 205, Glendale Heights,
IL 60139, U.S.A
Email: info@santintusa.com


SANTINT • BRAZIL

Add: Av. Rosa Kasinski, 1109,
G11 e 12 Capuava, Mauá,
SP - Brasil CEP 09380-128
Email: marcos@santint.com


SANTINT • INDIA

Add: H.No.692, Gala No.04, Print
World Industrial Complex,
Bhatale, Vehele Village, Opposite
Balaji Compound, Bhiwandi,
Maharashtra - 421302
Email: nick@santint.com

Cantilever Palletizer FEATURES >>>

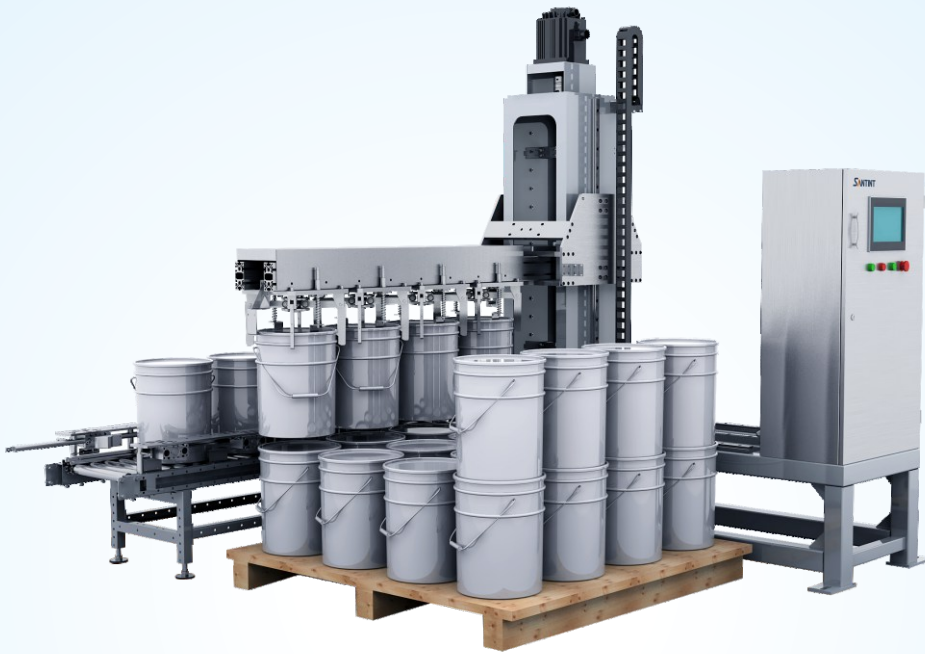

Customizable Palletizing Patterns

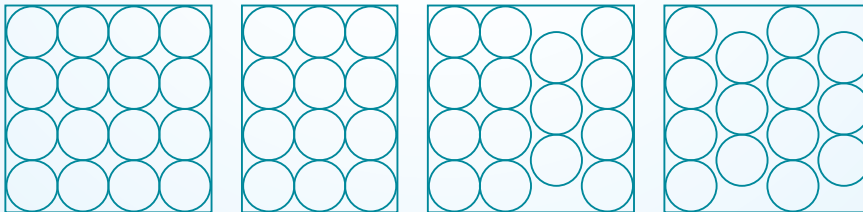

4x4

4x3

4-4-3-4

4-3-4-3

- 1 Smart pail positioning and gripping for efficient palletizing.
- 2 Programmable control with adjustable settings for pail height, palletizing distance, etc., ideal for a variety of pail sizes.
- 3 Servo motor driven for high positioning accuracy.
- 4 Self-controlled palletizing system, no protocol needed, easy to connect.
- 5 Movable design allows for multi-purpose use and adaptability to different sites.

- Palletizing Speed: 12pails/min
- Conveying Speed: 5000mm/min
- Power Supply: AC380V±10%50Hz
- Air Consumption: 0.5m³/min
- Air Pressure: 0.6MPa
- Rated Power: 4kW
- Pallet Dimensions: 1000x1200x150mm 1200x1200x150mm (Customizable)
- Compatible Pail Size: φ300-340mm H 300-380mm

Cantilever Palletizer

<<< Technical Parameters

