

A2 -100%

Automatic Dispenser



➡ 100% Recirculation

➡ Box Tinting (Android)

SANTINT • CHINA

Add: Feilong Road, Xingyang,
Zhengzhou, China
Email: info@santint.com

SANTINT • HOLLAND

Add: Lageweg 35 - J, 2222 AG
Katwijk The Netherlands
Email: sales@santint-europe.com

SANTINT • POLAND

Add: 19 Postępu Street
(warehouse no. 5)02-676
Warsaw, Poland
Email: albert@santintpoland.com

SANTINT • U.S.A

Add: 2000 Bloomingdale Road,
Suite 205, Glendale Heights,
IL 60139, U.S.A
Email: info@santintusa.com

SANTINT • BRAZIL

Add: Av. Rosa Kasinski,
1109, G29 Capuava, Mauá,
SP - Brasil CEP 09380-128
Email: marcos@santint.com

SANTINT • INDIA

Add: H.No.692, Gala No.04, Print
World Industrial Complex,
Bhatele, Vehele Village, Opposite
Balaji Compound, Bhiwandi,
Maharashtra - 421302
Email: nick@santint.com


A2-100% FEATURES >>>



Bluetooth/Wireless Module(Optional)

1 100% Recirculation

Zero nozzle dryness/blockage;
purge-free;
maintenance-free;
colorant saving;
stable accuracy.

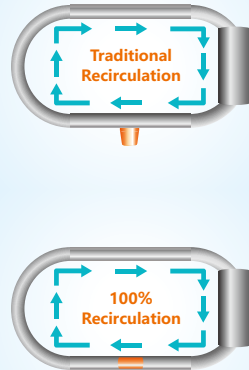

2 Box/Table Tinting

Saving PC cost;
pre-installed software,
shorter installation time.




3 Calibration-free Piston Pump



4 Piston Rod Detection

Warning when the piston is not pushed down.



<p>P1 Piston Pump Sequential Dispensing</p> <ul style="list-style-type: none"> Minimum Shot: 1/384Y(0.077ml) Canister Size: 1.8L / 2.3L POM; 2.3L / 3.8L Stainless Steel (Optional) NO. of Canisters: Up to 16 Max Can Size (D X H): 320X600mm Machine Dimension (W X D X H): 707X848X1300mm Packing Dimension (W X D X H): 830X990X1500mm Loading Quantity: 14 Pieces/20GP Net Weight: 130kg Gross Weight: 155kg 	<ul style="list-style-type: none"> Flow Rate: 600ml/min Efficiency: 200ml/min Pump Capacity: 60ml Stirring Speed: 20rpm Power: ≤ 100W Power Supply: 220V/110V 50Hz/60Hz
---	---

A2 - 100% Technical Parameters

